



RANGE HOODS



PRODUCTS OF SUPERIOR CRAFTSMANSHIP SINCE 1980

About Nadair's legacy

Since 1980, we've optimized the European blend of style and functionality, specializing in ceiling fans, lighting, and central vacuum systems. Our Innovative designs have made a global impact, resonating across Europe, Asia, and North America by introducing contemporary design, avant-garde functions, and great engineering for almost 45 years.

OVO novelty

We are delighted to introduce our brand-new line of range hoods.

Established in 2016, OVO by Nadair has quickly become synonymous with innovation and excellence in home solutions, and our latest range hoods showcase our unwavering commitment to being ahead of the curve.

Meticulously crafted to elevate your kitchen experience, these range hoods embody cutting-edge design, powerful functionality, and a dedication to enhancing the heart of your home.

Discover a perfect blend of style and efficiency as we redefine kitchen ventilation and lighting. With new features that once again demonstrate the integration of lighting and fan tradition, we introduce selectable LED color temperatures (CCT) and dusk-to-dawn lighting with our newest range hoods that are designed to meet the diverse needs of modern living.

Efficient service, unmatched satisfaction

We take pride in servicing customers for more than 35 years. Our dedicated and passionate team will guide you through choosing the most suitable unit for your home and provide support during the installation and even afterwards via email, phone, chat, and social media. Choosing an OVO product means you're now a valued member of our community!



TABLE OF CONTENTS

1. ABOUT US	P.2
2. EXCLUSIVE FEATURES	P.4-5
3. UNDER CABINET RANGE HOODS	P.6-25
4. BUILT-IN RANGE HOODS	P.26-39
5. PYRAMID CONVERTIBLE RANGE HOODS	P.40-47
6. GLASS CANOPY RANGE HOODS	P.48-52
7. ACCESSORIES AND PARTS	P.53



EXCLUSIVE FEATURES

UNVEILING THE OVO RANGE HOODS WITH CCT (COLOR CHANGING TECHNOLOGY) & DUSK-TO-DAWN TECHNOLOGY A WELL DESERVED UPDATE TO THE RANGE HOOD INDUSTRY !

As a leader of integrated and non-integrated LED Lighting systems, we are proud to introduce simple, yet very appreciated features by the consumer in the lighting industry; the Selectable Color Temperature Changing LED Lights and Dusk-to-Dawn technology.

Developed through extensive consumer research and designed for both aesthetics and practicality these, range hoods provide unprecedented control over kitchen lighting ambiance, seamlessly transitioning between the five pre-set and built-in warm and cool tones of the white color spectrum of light preferred by the North-American consumer to suit various tasks and moods ranging from 2700k to 5000k. Another innovative feature from our lighting heritage is the dusk-to-dawn light technology. If turn on the dusk-to-dawn light mode, the range hood lights will automatically open at sunset for a mellow ambiance all night until the morning when it shuts off at dawn!

5 SELECTABLE COLOR TEMPERATURE SETTINGS INTO 1 UNIT - CREATE YOUR AMBIANCE

For added style, you can easily match your OVO Range Hood lighting with other features in you kitchen such as under-cabinet, recessed and decorative lighting, creating a cohesive and sophisticated living space.



FROM DUSK-TO-DAWN

Thanks to the light sensor, your kitchen will always be well-lit. At sunset a soft night light will automatically turn on and it will turn off at dawn.



EXCLUSIVE FEATURES

3 LEVELS OF LIGHT INTENSITY

3-intensity LED light bulbs are ideal for energy savings, controllability adjustable ambiance and longevity. Select the desired intensity to create the perfect ambiance for your kitchen.



SMART RANGE HOOD

From central vacuum to slim lights, our innovated products gives us the opportunity to develop exclusive smart range hoods to follow the needed trend.




Powered by
NADAIR®
SMART



DUCTED UNDER CABINET RANGE HOODS

Streamlined functionality that neatly conceals itself under your cabinet



DUCTED UNDER CABINET STAINLESS STEEL RANGE HOOD



Electronic Push Button Controls

Precise and easy-to-use illuminated controls for simple function selection, designed for effortless accuracy



From DUSK-TO-DAWN Auto Night Light Setting

A warm soft light turns on when it's dark and off when it's bright.



Light sensor



5 Minutes Delayed Shut-off

Automatically vents excess odors and other contaminants outside.



3-speed levels

Adjust the speed to meet your cooking needs.



Durable construction

Stainless steel
Commercial-grade 430
Will never rust



Power Airflow

Available in 450 CFM and 700 CFM




Quiet Mode

55 Decibel^{*}
As quiet as air conditioning^{**}



LED Lights - Energy Saver

3 W LED Lights = 30 W halogen / 400 Lumens
Dimmable / CRI 80 / up to 50 000 hrs
Wall washer lighting



High-Efficiency 5-layer Aluminum Filters Dishwasher safe:

Allow air to flow with ease, effectively capturing grease particles and trapping pollutants.



Hardwired

*1 Compare to the average air conditioning

**2 Starting at 55 decibel at low speed



30" Ducted under cabinet range hood

OV-1002



450 CFM

OV-1001



700 CFM

OV-1013



700 CFM



*** Select this link to see the product video

*** Select this link to see the product special features video

Features



3-speed levels



Electronic push
button illuminated
controls



From DUSK-TO-DAWN
Auto night light setting



5-minute
Auto Shut-off



2 x 3 W LED lights
400 Lumens^{*1}



Dimmable
0% - 100%



5 Built-in light color
temperature settings



55 dBA^{*2}

^{*1} At 5000K Setting

^{*2} Starting at 55 decibel at low speed





30" Ducted under cabinet range hood



MODEL NUMBER	OV-1002	OV-1001 / OV-1013
MATERIALS/FINISH		
FINISH	Stainless steel	
MATERIAL	Stainless steel Grade 430	
CONTROLS AND FEATURES		
CONTROLS TYPE	Electronic push button	
FAN SPEED	3-speed levels	
TIME DELAY	Yes	
AUTO NIGHT LIGHT	Yes	
LED DISPLAY	Yes	
VENTING		
FILTERS	5-Layer aluminum mesh filters - Dishwasher safe	
VENTING SIZE	7" (17.9 cm) round or 3 1/4" x 10" (8.3 cm x 25.4 cm) rectangle, top or rear	
EXTRACTION TYPE	Ducted	
LIGHTING		
LIGHT BULB TYPE	2 x 3 W LED - Included	
LUMENS	600 Lumens at 5000K setting	
COLOR TEMPERATURE	5 Built-in color temperature options (2700K to 5000K)	
MOTOR		
CFM	450	700
POWER RATING	120 V / 60 Hz (cETlus Certified)	
INPUT	135W	195 W
AMP	1.2A	1.8A
NOISE LEVEL	55/65/73 dBA	TBC
FAN TYPE	Centrifugal	
TYPE	Single Chamber Quiet	

Dimensions

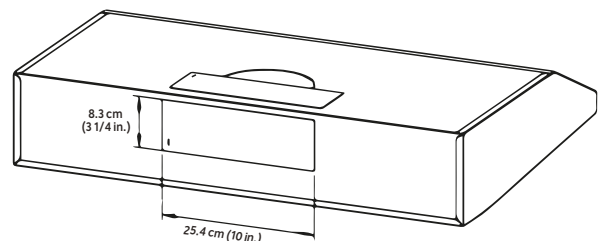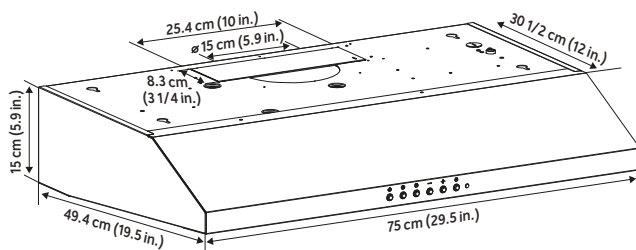



30" Ducted under cabinet range hood

OV-1014




450 CFM

OV-1003



700 CFM

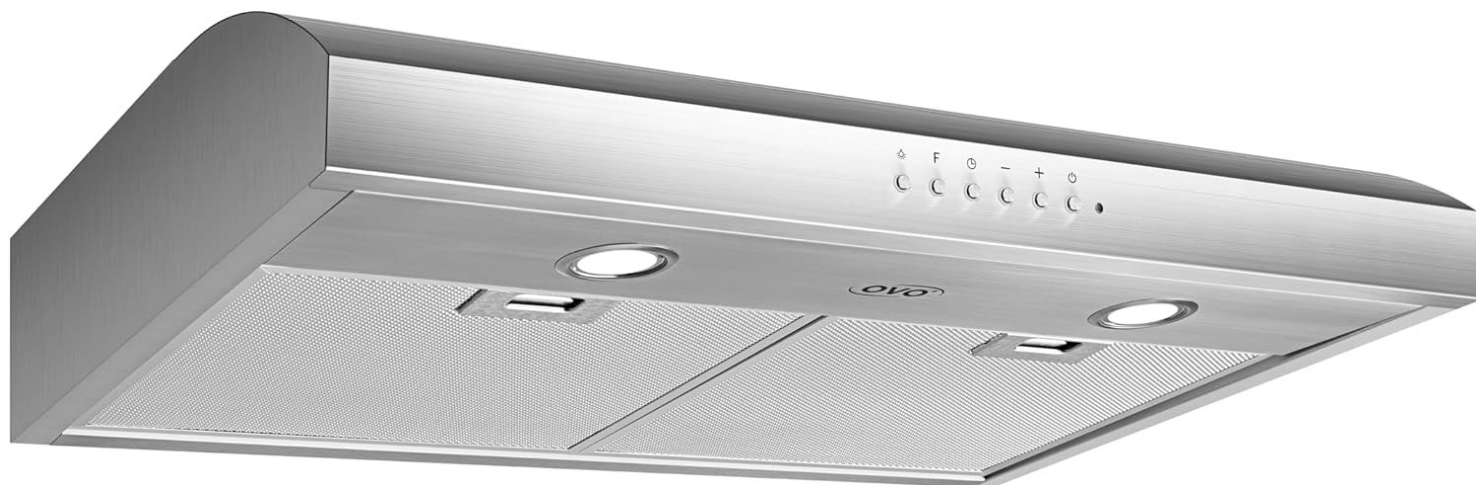

*** Select this link to see the product video

*** Select this link to see the product special features video

Features



3-speed levels



Electronic push
button illuminated
controls



From DUSK-TO-DAWN
Auto night light setting



5-minute
Auto Shut-off



2 x 3 W LED lights
400 Lumens^{*1}



Dimmable
0% - 100%



5 Built-in light color
temperature settings



55 dBA^{*2}

^{*1} At setting 5000K



^{*2} Starting at 55 decibel at low speed




30" Ducted under cabinet range hood



MODEL NUMBER	OV-1014	OV-1003
MATERIALS/FINISH		
FINISH	Stainless steel	
MATERIAL	Stainless steel Grade 430	
CONTROLS AND FEATURES		
CONTROLS TYPE	Electronic push button	
FAN SPEED	3-speed levels	
TIME DELAY	Yes	
AUTO NIGHT LIGHT	Yes	
LED DISPLAY	Yes	
VENTING		
FILTERS	5-Layer aluminum mesh filters - Dishwasher safe	
VENTING SIZE	6" (13.3 cm) round or 3 1/4" x 10" (8.3 cm x 25.4 cm) rectangle, top or rear	
EXTRACTION TYPE	Ducted	
LIGHTING		
LIGHT BULB TYPE	2 x 3 W LED - Included	
LUMENS	600 Lumens at 5000K setting	
COLOR TEMPERATURE	5 Built-in color temperature options (2700K to 5000K)	
MOTOR		
CFM	450	700
POWER RATING	120 V / 60 Hz (cETlus Certified)	
INPUT	135 W	TBC
AMP	1.2 A	TBC
NOISE LEVEL	55/65/73 dBA	55/65/73 dBA
FAN TYPE	Centrifugal	
TYPE	Single Chamber Quiet	

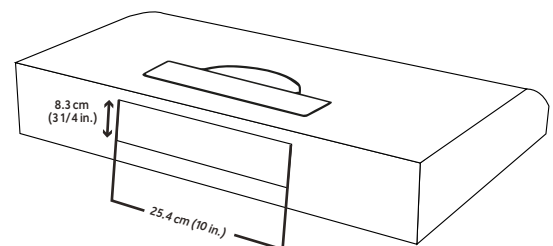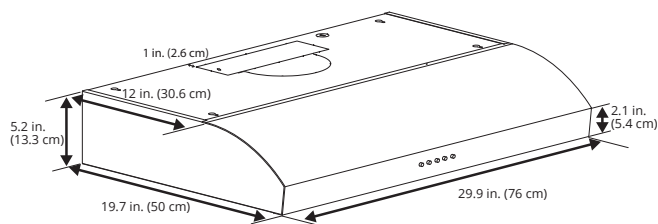

DUCTED UNDER CABINET STAINLESS STEEL RANGE HOOD



Sensor Touch Button Controls
Precise and easy-to-use **illuminated** controls for simple function selection, designed for effortless accuracy



From DUSK-TO-DAWN Auto Night Light Setting
A warm soft **light turns on** when it's dark and **off** when it's bright.

Auto Night Light
Light sensor



Power Airflow
Available in **450 CFM** and **700 CFM**



3-speed levels
Adjust the speed to meet your cooking needs.



5 Minutes Delayed Shut-off
Automatically vents excess odors and other contaminants outside.



Durable construction
Stainless steel **Commercial-grade 430**
Will never rust



Quiet Mode
59 Decibel*
As quiet as air conditioning**



Commercial Style Baffle Filters
Dishwasher safe:

Ensures durability and efficient operation
Allow air to flow with ease, effectively capturing grease particles and trapping pollutants.



LED Lights - Energy Saver
3 W LED Lights = 30 W halogen / 300 Lumens
Dimmable / CRI 80 / up to 50 000 hrs



Hardwired

*1 Compare to the most popular air conditioning

**2 Starting at 59 decibel at low speed



30" Ducted under cabinet range hood

OV-1004



450 CFM

OV-1024



700 CFM



Special Features



3-speed levels



Sensor touch
button illuminated
controls



From DUSK-TO-DAWN
Auto night light setting



5-minute
Auto Shut-off



2 x 3 W LED lights
400 Lumens^{*1}



Dimmable
0% - 100%



5 Built-in light color
temperature settings



59 dBA^{*2}

^{*1} at 5000K settings

^{*2} Starting at 59 decibel at low speed



Ducted under cabinet range hood



Hardwired

MODEL NUMBER	OV-1004	OV-1024
---------------------	---------	---------

MATERIALS/FINISH

FINISH	Stainless steel
MATERIAL	Stainless steel Grade 430

CONTROLS AND FEATURES

CONTROLS TYPE	Electronic sensor touch
FAN SPEED	3-speed levels
TIME DELAY	Yes
AUTO NIGHT LIGHT	Yes
LED DISPLAY	Yes

VENTING



FILTERS	Thin baffle filters - Dishwasher safe
VENTING SIZE	6" (13.3 cm) round or 3 1/4" x 10" (8.3 cm x 25.4 cm) rectangle, top or rear
EXTRACTION TYPE	Ducted


LIGHTING

LIGHT BULB TYPE	2 x 3 W LED - Included
LUMENS	400 Lumens at 5000K setting
COLOR TEMPERATURE	5 Built-in color temperature options (2700K to 5000K)


MOTOR

CFM	450	700
POWER RATING	120 V / 60 Hz (cETIus Certified)	
INPUT	141W (135W + 2 x 3W)	195
AMP	0.93A	18A
NOISE LEVEL	59 / 65 / 71 dBA	TBC
FAN TYPE	Centrifugal	
TYPE	Single Chamber Quiet	

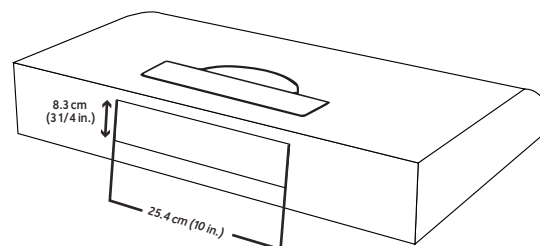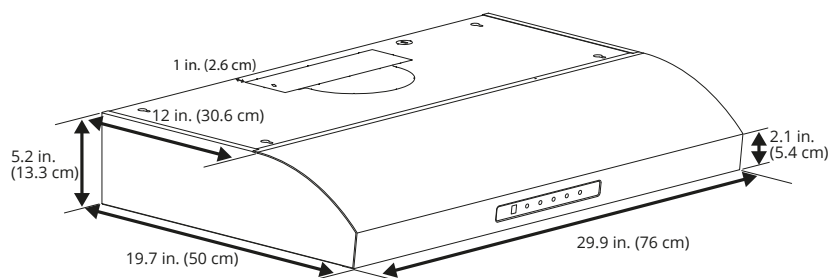




CONVERTIBLE UNDER CABINET STAINLESS STEEL RANGE HOOD

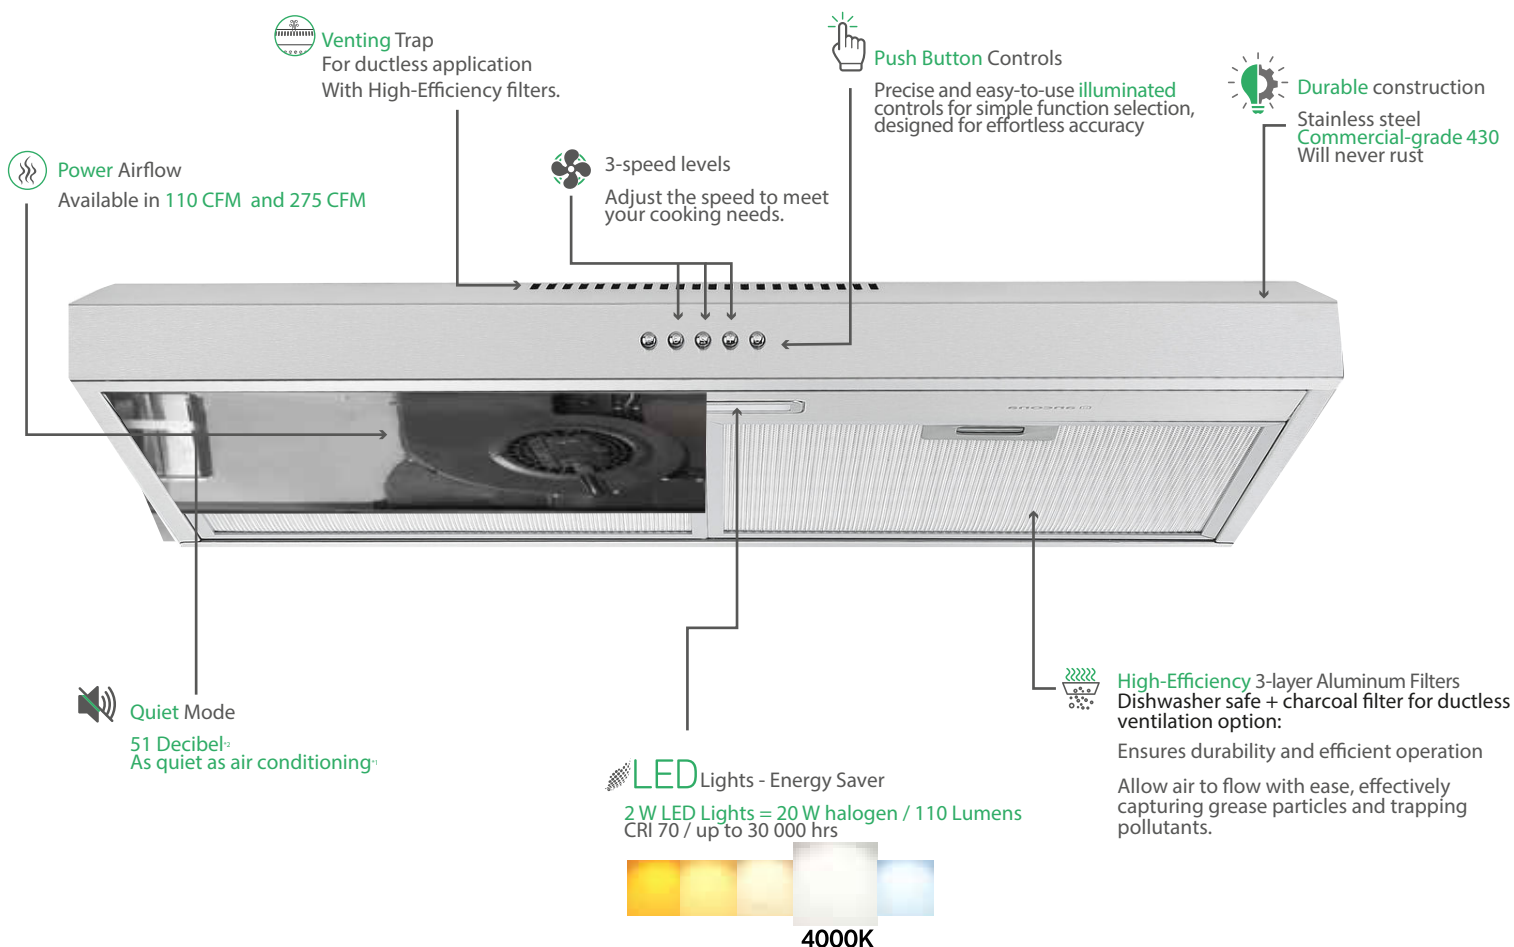

CONVERTIBLE: CAN BE INSTALLED DUCTED OR DUCTLESS

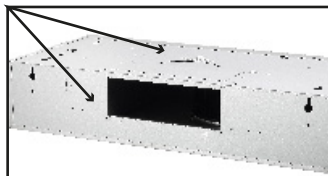

TOP AND REAR VENTING FOR
DUCTED APPLICATION



TOP VENTING TRAP FOR DUCTLESS
APPLICATION WITH **CHARCOAL**
FILTER INCLUDED

*1 Compare to the most popular air conditioning

**2 Starting at 51 decibel at low speed



Hardwired

30" Convertible under cabinet range hood

Carbon filters included for a (Non-Vented/Duct-Free) ductless installation

OV-1026



110 CFM

OV-1006R



275 CFM



Induction



Electric

Features



3-speed levels



Mechanical push
button controls



1 x 2 W LED light
110 Lumens



4000K
Cool white



51 dBA*²

30" Convertible under cabinet range hood

Carbon filters included for a (Non-Vented/Duct-Free) ductless installation

OV-1027



110 CFM

OV-1007RWH



275 CFM



4



Features



3-speed levels



Mechanical push
button controls



1 x 2 W LED light
110 Lumens



4000K
Cool white



51 dBA^{*2}

Convertible under cabinet range hood



Hardwired

MODEL NUMBER	OV-1026	OV-1006R	OV-1027	OV-1007RWH
--------------	---------	----------	---------	------------

MATERIALS/FINISH

FINISH	Stainless steel	White
MATERIAL	Stainless steel Grade 430	

CONTROLS AND FEATURES

CONTROLS TYPE	Mechanical push button
FAN SPEED	3-speed levels
TIME DELAY	No
AUTO NIGHT LIGHT	No
LED DISPLAY	No

VENTING




FILTERS	3-Layer aluminum mesh filters / Dishwasher safe + Carbon filter for ductless ventilation
VENTING SIZE	6" (13.3 cm) round or 3 1/4" x 10" (8.3 cm x 25.4 cm) rectangle, top or rear
EXTRACTION TYPE	Convertible: Ducted / Ductless

LIGHTING

LIGHT BULB TYPE	1 x 2 W LED - Included
LUMENS	110 Lumens
COLOR TEMPERATURE	4000K Cool white

MOTOR

CFM	110	275	110	275
POWER RATING	120 V / 60 Hz (cETlus Certified)			
INPUT	80W	87W	80W	87W
AMP	0.69A	TBC	0.69A	TBC
NOISE LEVEL	51/52/57 dBA	TBC	51/52/57 dBA	TBC
FAN TYPE	Centrifugal			
TYPE	Single Chamber Quiet			

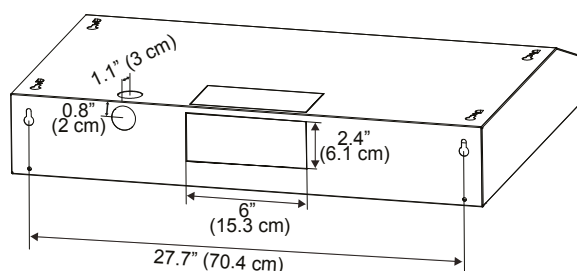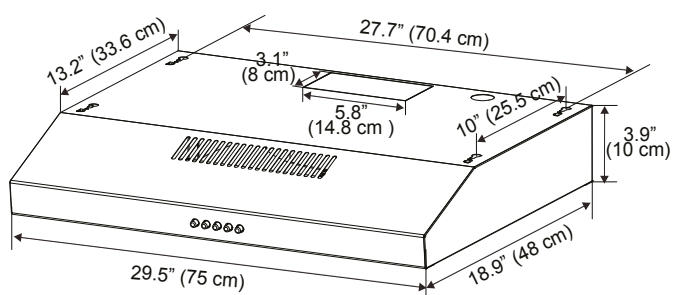

Air trap plate for ducted application



DUCTED UNDER CABINET STAINLESS STEEL RANGE HOOD



Mechanical Push Button Controls

Precise and easy-to-use controls for simple function selection, designed for effortless accuracy



Power Airflow

Available in 440 CFM and 600 CFM



3-speed levels

Adjust the speed to meet your cooking needs.



Durable construction

Stainless steel
Commercial-grade 430
Will never rust



Quiet Mode

TBC Decibel[®]
As quiet as air conditioning^{*}



High-Efficiency 5-Layer Aluminum Filters Dishwasher safe:

Allow air to flow with ease, effectively capturing grease particles and trapping pollutants.



LED Lights - Energy Saver

1.5 W LED Lights = 15 W halogen / 220 Lumens
CRI 70/p to 30 000 hrs



4000K



Plug-in

^{*}1 Compare to the most popular air conditioning

^{*}2 Starting at TBC decibel at low speed

30" Ducted under cabinet range hood

OV-1017



450 CFM

OV-1009



600 CFM



Features



3-speed levels



Mechanical push
button controls



2 x 1.5 W LED light
220 Lumens



4000K
Cool white



TBC dBA^{*2}

Ducted under cabinet range hood



MODEL NUMBER	OV-1017	OV-1009
---------------------	---------	---------

MATERIALS/FINISH

FINISH	Stainless steel
MATERIAL	Stainless steel Grade 430

CONTROLS AND FEATURES

CONTROLS TYPE	Mechanical push button
FAN SPEED	3-speed levels
TIME DELAY	No
AUTO NIGHT LIGHT	No
LED DISPLAY	No

VENTING



FILTERS	5-layer aluminum mesh filter - Dishwasher safe
VENTING SIZE	6 " top round venting application
EXTRACTION TYPE	Ducted


LIGHTING

LIGHT BULB TYPE	2 x 1.5 W LED
LUMENS	200 Lumens
COLOR TEMPERATURE	4000K Cool white

MOTOR

CFM	450	600
POWER RATING	120 V / 60 Hz (cETIus Certified)	
INPUT	193W	303W
AMP	1.61A	TBC
NOISE LEVEL	TBC dBA	TBC
FAN TYPE	Centrifugal	
TYPE	Squirrel cage	

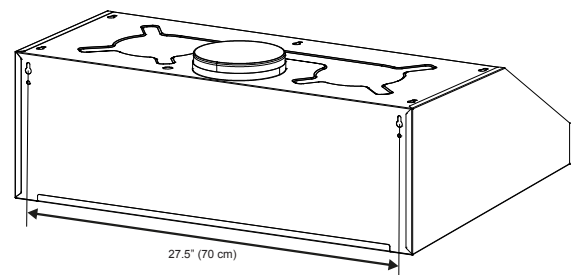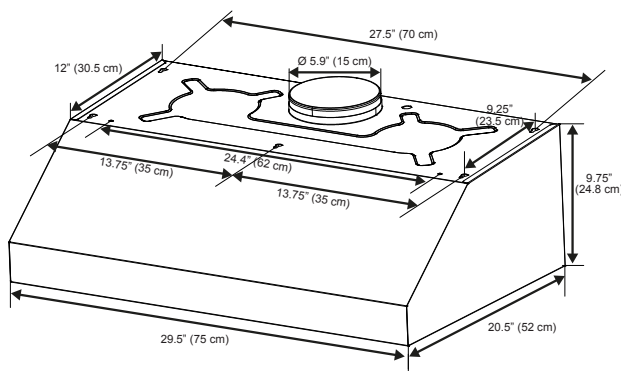



CONVERTIBLE UNDER CABINET STAINLESS STEEL RANGE HOOD



Venting Trap
 For ductless application
 With High-Efficiency filters.



Rocker Switch Controls
 Precise and easy-to-use
 controls for simple function selection,
 designed for effortless accuracy



2-Speed Control levels
 Adjust the speed to meet
 your cooking needs.



Durable construction
 Stainless steel
Commercial-grade 430
 Will never rust



Power Airflow
 Available in 175 CFM and 225 CFM



Quiet Mode
 46 Decibel*
 As quiet as air conditioning**



LED Lights - Energy Saver
 2 W LED Lights = 20 W halogen / 110 Lumens
 CRI 70 / Up to 30 000 hrs




4000K



High-Efficiency 2-layer Aluminum Filters
 With Charcoal Sheet / Dishwasher safe + Carbon
 Filter for Ductless ventilation option:

Allow air to flow with ease, effectively
 capturing grease particles and trapping
 pollutants.

CONVERTIBLE: CAN BE INSTALLED DUCTED AND DUCTLESS



TOP AND REAR VENTED FOR
 DUCTED INSTALLATION



FRONT AIR TRAP FOR
 DUCTLESS APPLICATION
CARBON FILTER INCLUDED



Hardwired

*1 Compare to the most popular air conditioning

**2 Starting at 46 decibel at low speed

30" Convertible under cabinet range hood

Carbon filters included for a (Non-Vented/Duct-Free) ductless installation

OV-1031



175 CFM

OV-1011R



225 CFM



Features



2-speed levels



Rocker
switch controls



1x 2 W LED light
110 Lumens



4000K
Cool white



46 dBA*²

30" Convertible under cabinet range hood

Carbon filters included for a (Non-Vented/Duct-Free) ductless installation

OV-1032



175 CFM

OV-1012R



225 CFM



Features



2-speed levels



Rocker
switch controls



1 x 2 W LED light
110 Lumens



4000K
Cool white





46 dBA*²

Convertible under cabinet range hood



MODEL NUMBER		OV-1032	OV-1011R	OV-1032	OV-1012R
MATERIALS/FINISH					
FINISH		Stainless steel		White	
MATERIAL		Stainless steel Grade 430			
CONTROLS AND FEATURES					
CONTROLS TYPE		Rocker Switch			
FAN SPEED		2-speed levels			
TIME DELAY		No			
AUTO NIGHT LIGHT		No			
LED DISPLAY		No			
VENTING					
FILTERS		2-Layer aluminum mesh filters with charcoal sheet - Dishwasher safe Carbon filter included for ductless ventilation option			
VENTING SIZE		6" (13.3 cm) round or 3 1/4" x 10" (8.3 cm x 25.4 cm) rectangle, top or rear			
EXTRACTION TYPE		Convertible: Ducted / Ductless			
LIGHTING					
LIGHT BULB TYPE		1 x 2W LED - Included			
LUMENS		110 Lumens			
COLOR TEMPERATURE		4000K Cool white			
MOTOR					
CFM		175	225	175	225
POWER RATING		120 V / 60 Hz (cETIus Certified)			
INPUT		52W	225	52W	225
AMP		0.44A	TBC	0.44A	TBC
NOISE LEVEL		46/53 dBA	TBC	46/53 dBA	TBC
FAN TYPE		Centrifugal			
TYPE		Single Chamber Quiet			

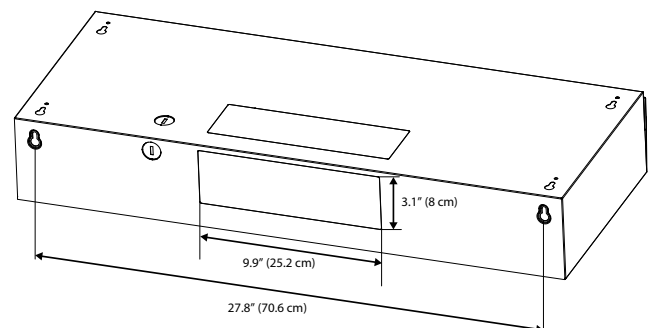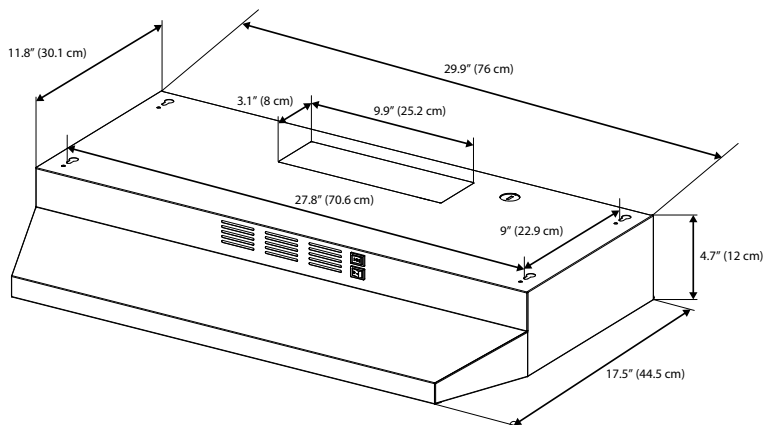



BUILT-IN RANGE HOODS

Elevate your kitchen design with our built-in range hoods, seamlessly blending functionality and style for optimal ventilation and a polished aesthetic



BUILT-IN STAINLESS STEEL RANGE HOOD



Electronic Push Button controls
Precise and easy-to-use **illuminated** controls for simple function selection, designed for effortless accuracy



Power Airflow
Available in **680 CFM** and **900 CFM**



5 Minutes Delayed Shut-off
Automatically vents excess odors and other contaminants outside.




5-Speed Control levels
Adjust the speed to meet your cooking needs.





From DUSK-TO-DAWN Auto Night Light Setting

A warm soft light turns on when it's dark and off when it's bright.



Durable construction
Stainless steel **Commercial-grade 430**
Will never rust

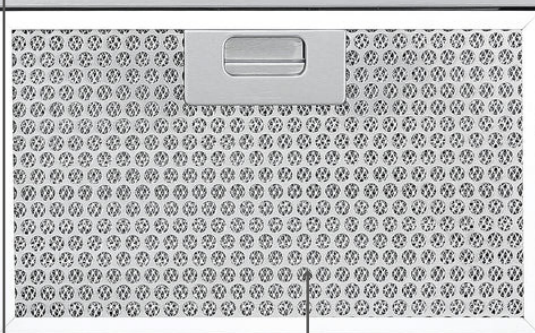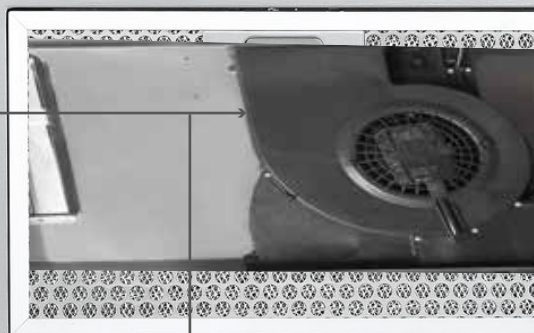

Ultra Quiet Mode
43 Decibel*
As quiet as air conditioning*



LED Lights - Energy Saver

3 W LED Lights = 30 W halogen / 400 Lumens
3-Intensity / CRI 80 / up to 50 000 hrs



Decorative 5-layer stainless steel panels with aluminum mesh core filters / dishwasher safe:

Ensures durability and efficient operation
Allow air to flow with ease, effectively capturing grease particles and trapping pollutants.



Plug-in

*1 Compare to the most popular air conditioning

*2 Starting at 43 decibel at low speed



28" Built-in range hood

OV-3015



680 CFM

OV-3001



900 CFM



*** Select this link to see the product video

*** Select this link to see the product special features video

Features



5-speed levels



Electronic push
button illuminated
controls



From DUSK-TO-DAWN
Auto night light setting



5-minutes
Auto Shut-off



2 x 3 W LED lights
400 Lumens^{*1}



Dimmable
0% - 100%



5 Built-in light color
temperature settings



ULTRA QUIET mode
43 dBA^{*2}

^{*1} At 5000K Setting

^{*2} Starting at 43 decibel at low speed



Built-in range hood



Plug-in

MODEL NUMBER

OV-3015

OV-3001

MATERIALS/FINISH

FINISH	Stainless steel
MATERIAL	Stainless steel Grade 430

CONTROLS AND FEATURES

CONTROLS TYPE	Electronic push button
FAN SPEED	5-speed level
TIME DELAY	Yes
AUTO NIGHT LIGHT	Yes
LED DISPLAY	Yes

VENTING



FILTERS	5-Layer decorative filter - Dishwasher safe
VENTING SIZE	6" (13.3 cm) round top venting
EXTRACTION TYPE	Built-in

LIGHTING

LIGHT BULB TYPE	2 x 3 W LED
LUMENS	400 Lumens at 5000K setting
COLOR TEMPERATURE	5 Built-in color temperature options (2700K to 5000K)

MOTOR

CFM	680	900
POWER RATING	120 V / 60 Hz (cETIus Certified)	
INPUT	406 W	806 W
AMP	3.4A	TBC
NOISE LEVEL	43/67/73/77/78 dBA	TBC
FAN TYPE	Centrifugal	
TYPE	Squirrel cage	

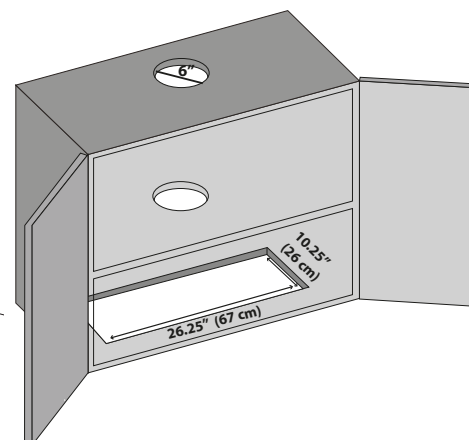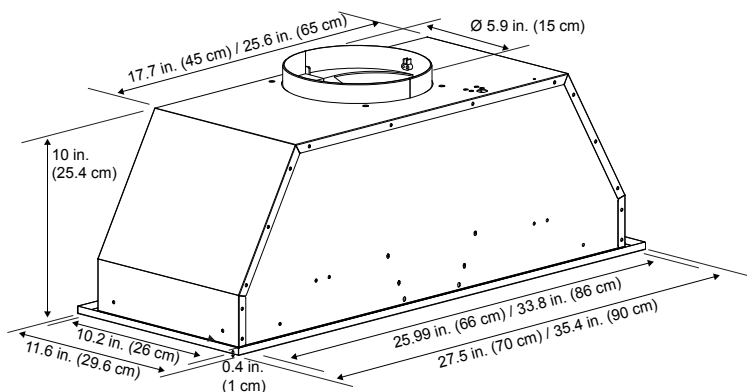



36" Built-in range hood

OV-3016



680 CFM

OV-3002



900 CFM



Features



5-speed levels



Electronic push
button illuminated
controls



From DUSK-TO-DAWN
Auto night light setting



5-minute
Auto Shut-off



2 x 3 W LED lights
400 Lumens^{*1}



Dimmable
0% - 100%



5 Built-in light color
temperature settings



ULTRA QUIET mode
43 dBA^{*2}

^{*1} At 5000K Setting

^{*2} Starting at 43 decibel at low speed



Built-in range hood



Plug-in

MODEL NUMBER	OV-3016	OV-3006
---------------------	---------	---------

MATERIALS/FINISH

FINISH	Stainless steel
MATERIAL	Stainless steel Grade 430

CONTROLS AND FEATURES

CONTROL TYPE	Electronic push button
FAN SPEED	5-speed levels
TIME DELAY	Yes
AUTO NIGHT LIGHT	Yes
LED DISPLAY	Yes

VENTING



FILTERS	5-layer decorative filter - Dishwasher safe
VENTING SIZE	6 " (13.3 cm) round top venting
EXTRACTION TYPE	Built-in

LIGHTING

LIGHT BULB TYPE	2 x 3 W LED
LUMENS	400 Lumens at 5000K setting
COLOR TEMPERATURE	5 Built-in color temperature options (2700K to 5000K)

MOTOR

CFM	680	900
POWER RATING	120 V / 60 Hz (cETIus Certified)	
INPUT	406 W	806W
AMP	3.4A	TBC
NOISE LEVEL	43/67/73/77/78 dBA	TBC
FAN TYPE	Centrifugal	
TYPE	Squirrel Cage	

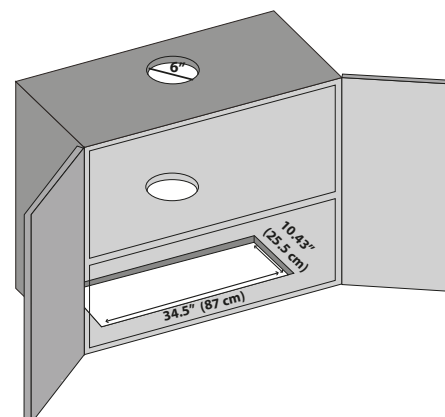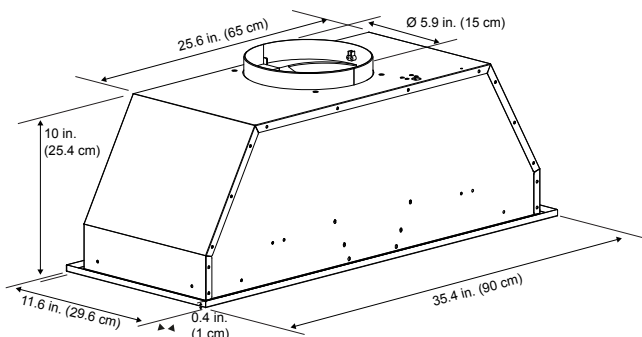



BUILT-IN STAINLESS STEEL RANGE HOOD



Power Airflow
Available in 440 CFM and 600 CFM



Electronic Push Button Controls
Precise and easy-to-use illuminated controls for simple function selection, designed for effortless accuracy



3-speed levels
Adjust the speed to meet your cooking needs.



5 Minutes Delayed Shut-off
Automatically vents excess odors and other contaminants outside.



Durable construction
Stainless steel
Commercial-grade 430
Will never rust



Quiet Mode
TBC Decibel^{*}
As quiet as air conditioning^{**}



LED Lights - Energy Saver
6 W LED Lights = 30 W halogen / 200 Lumens
CRI 70 / up to 30 000 hrs



4000K



Commercial Style Slanted Stainless Steel Baffle Filters / Dishwasher safe:

Provide extra grease trapping capabilities;

Stainless steel grease trays – with a special hidden-from-view, design effectively recover oil and grease;

Allow air to flow with ease, effectively capturing grease particles and trapping pollutants.



Plug-in

^{*}1 Compare to the most popular air conditioning

^{**}2 Starting at TBC decibel at low speed



28" Built-in range hood

OV-3022



450 CFM

OV-3013



600 CFM



Features



3-speed levels



Electronic push
button controls



5-minutes
Auto Shut-off



1x 6 W LED light
200 Lumens



4000K
Cool white



TBC dBA*2



Built-in range hood



Plug-in

MODEL NUMBER	OV-3022	OV-3013	
---------------------	---------	---------	--

MATERIALS/FINISH

FINISH	Stainless steel
MATERIAL	Stainless steel Grade 430

CONTROLS AND FEATURES

CONTROLS TYPE	Electronic push button
FAN SPEED	3-speed levels
TIME DELAY	Yes
AUTO NIGHT LIGHT	No
LED DISPLAY	No

VENTING



FILTERS	2 Slanted Baffle filters - Dishwasher safe
VENTING SIZE	6" (13.3 cm) round top venting
EXTRACTION TYPE	Built-in


LIGHTING

LIGHT BULB TYPE	1 x 6 W LED - Included
LUMENS	200 Lumens
COLOR TEMPERATURE	4000K cool white

MOTOR

CFM	450	600	
POWER RATING	120 V / 60 Hz (cETIus Certified)		
INPUT	196W	380W	
AMP	31.7 A	TBC	
NOISE LEVEL	TBC dBA	TBC	
FAN TYPE	Squirrel cage		

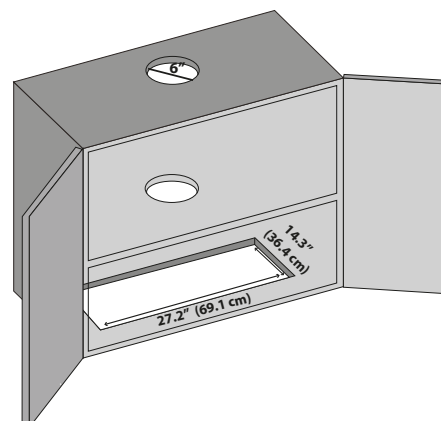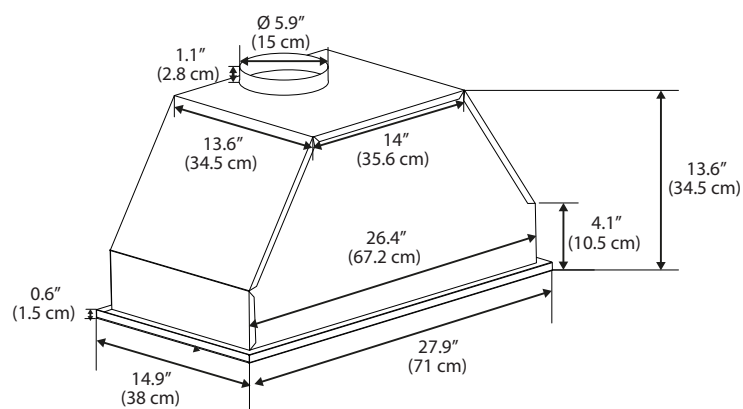



BUILT-IN UNDER STAINLESS STEEL RANGE HOOD



Mechanical Push Button Controls

Precise and easy-to-use controls for simple function selection, designed for effortless accuracy



3-speed levels

Adjust the speed to meet your cooking needs.



Power Airflow

Available in 280 CFM, 420 CFM and 600 CFM



Durable construction

Stainless steel
Commercial-grade 430
Will never rust



Quiet Mode

41 Decibel^{*1} ^{*2}
As quiet as air conditioning[®]



LED Lights - Energy Saver

1.5 W LED Light = 1.5 W halogen / 220 Lumens
CRI 80 / up to 30 000 hrs



4000K



High-Efficiency 3-Layer Aluminum Filters

Dishwasher safe:

Ensures durability and efficient operation

Allow air to flow with ease, effectively capturing grease particles and trapping pollutants.



Plug-in

^{*1} Compare to the most popular air conditioning

^{*2} Starting at 41 decibel at low speed

28" Built-in range hood

OV-3006



280 CFM

OV-3019



440 CFM

OV-3029



600 CFM



OV-3006



OV-3019/3029



Features



3-speed levels



Mechanical push
button controls



2 x 1.5 W LED lights
220 Lumens



4000K
Cool white



41 dBA*²

Built-in range hood



Plug-in

MODEL NUMBER	OV-3006	OV-3019	OV-3029
--------------	---------	---------	---------

MATERIALS/FINISH

FINISH	Stainless steel
MATERIAL	Stainless steel Grade 430

CONTROLS AND FEATURES

CONTROL TYPE	Mecanical push button
FAN SPEED	3-speed levels
TIME DELAY	No
AUTO NIGHT LIGHT	No
LED DISPLAY	No

VENTING



FILTERS	3-layer aluminum mesh filter / Dishwasher safe
VENTING SIZE	6" (13.3 cm) round top venting
EXTRACTION TYPE	Built-in

LIGHTING

LIGHT BULB TYPE	2 x 1.5 W LED
LUMENS	220 Lumens
COLOR TEMPERATURE	4000K cool white

MOTOR

CFM	280	440	600
POWER RATING	120 V / 60 Hz (cETIus Certified)		
INPUT	88 W	193W	383W
AMP	0.8 A	1.6 A	TBC
NOISE LEVEL	41/50/57 dBA	TBC	
FAN TYPE	Centrifugal		
TYPE	Squirrel cage		

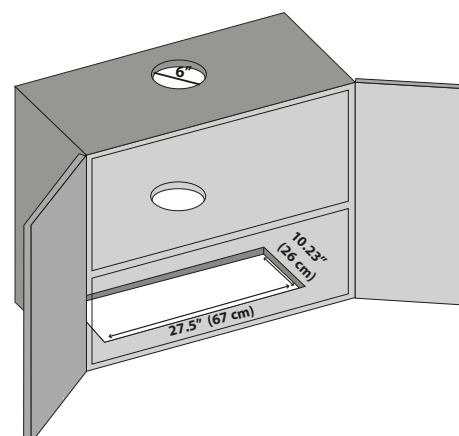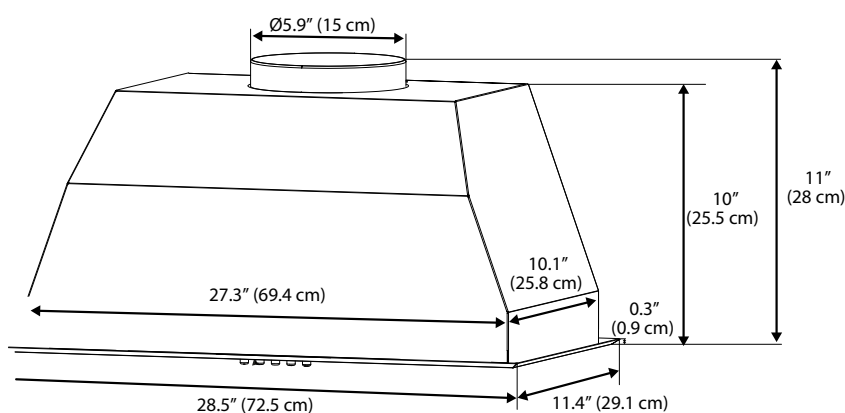

20.5" Built-in range hood

OV-3004



280 CFM

OV-3018



420 CFM

OV-3028



600 CFM



OV-3004



Induction



Electric

OV-3018/3028



Gas



Induction



Electric

Features



3-speed levels



Mechanical push
button controls



2 x 1.5 W LED lights
220 Lumens



4000K
Cool white



41 dBA^{*2}

Built-in range hood



MODEL NUMBER	OV-3004	OV-3018	OV-3028
---------------------	---------	---------	---------

MATERIALS/FINISH

FINISH	Stainless steel
MATERIAL	Stainless steel Grade 430

CONTROLS AND FEATURES

CONTROLS TYPE	Electronic push button
FAN SPEED	3-speed levels
TIME DELAY	No
AUTO NIGHT LIGHT	No
LED DISPLAY	No

VENTING



FILTERS	3-Layer aluminum mesh filter - Dishwasher safe
VENTING SIZE	6" (13.3 cm) round top venting
EXTRACTION TYPE	Built-in


LIGHTING

LIGHT BULB TYPE	2 x 1.5 W LE - Included
LUMENS	220 Lumens
COLOR TEMPERATURE	4000K cool white

MOTOR

CFM	280	420	600
POWER RATING	120 V / 60 Hz (cETIus Certified)		
INPUT	88 W	TBC	TBC
AMP	0.8 A	1.6 A	TBC
NOISE LEVEL	41/50/58 dBA	TBC	
FAN TYPE	Centrifugal		
TYPE	Single Chamber Quiet		

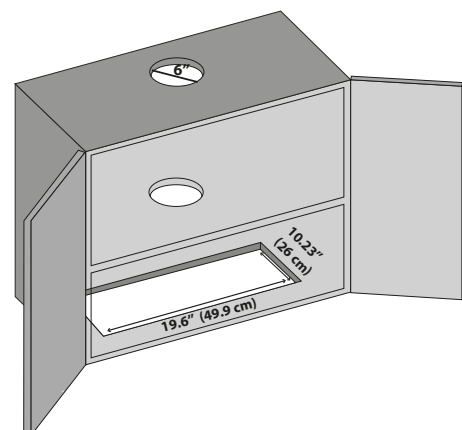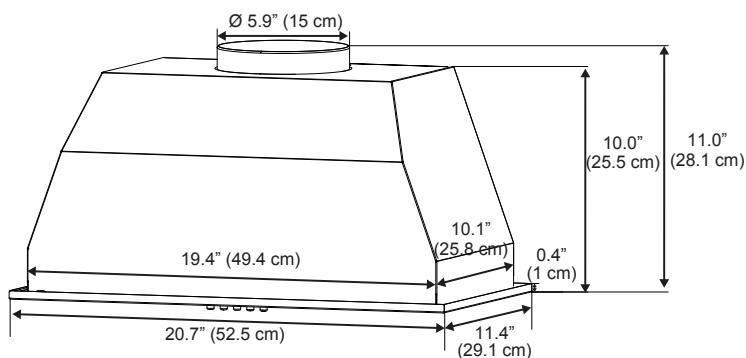


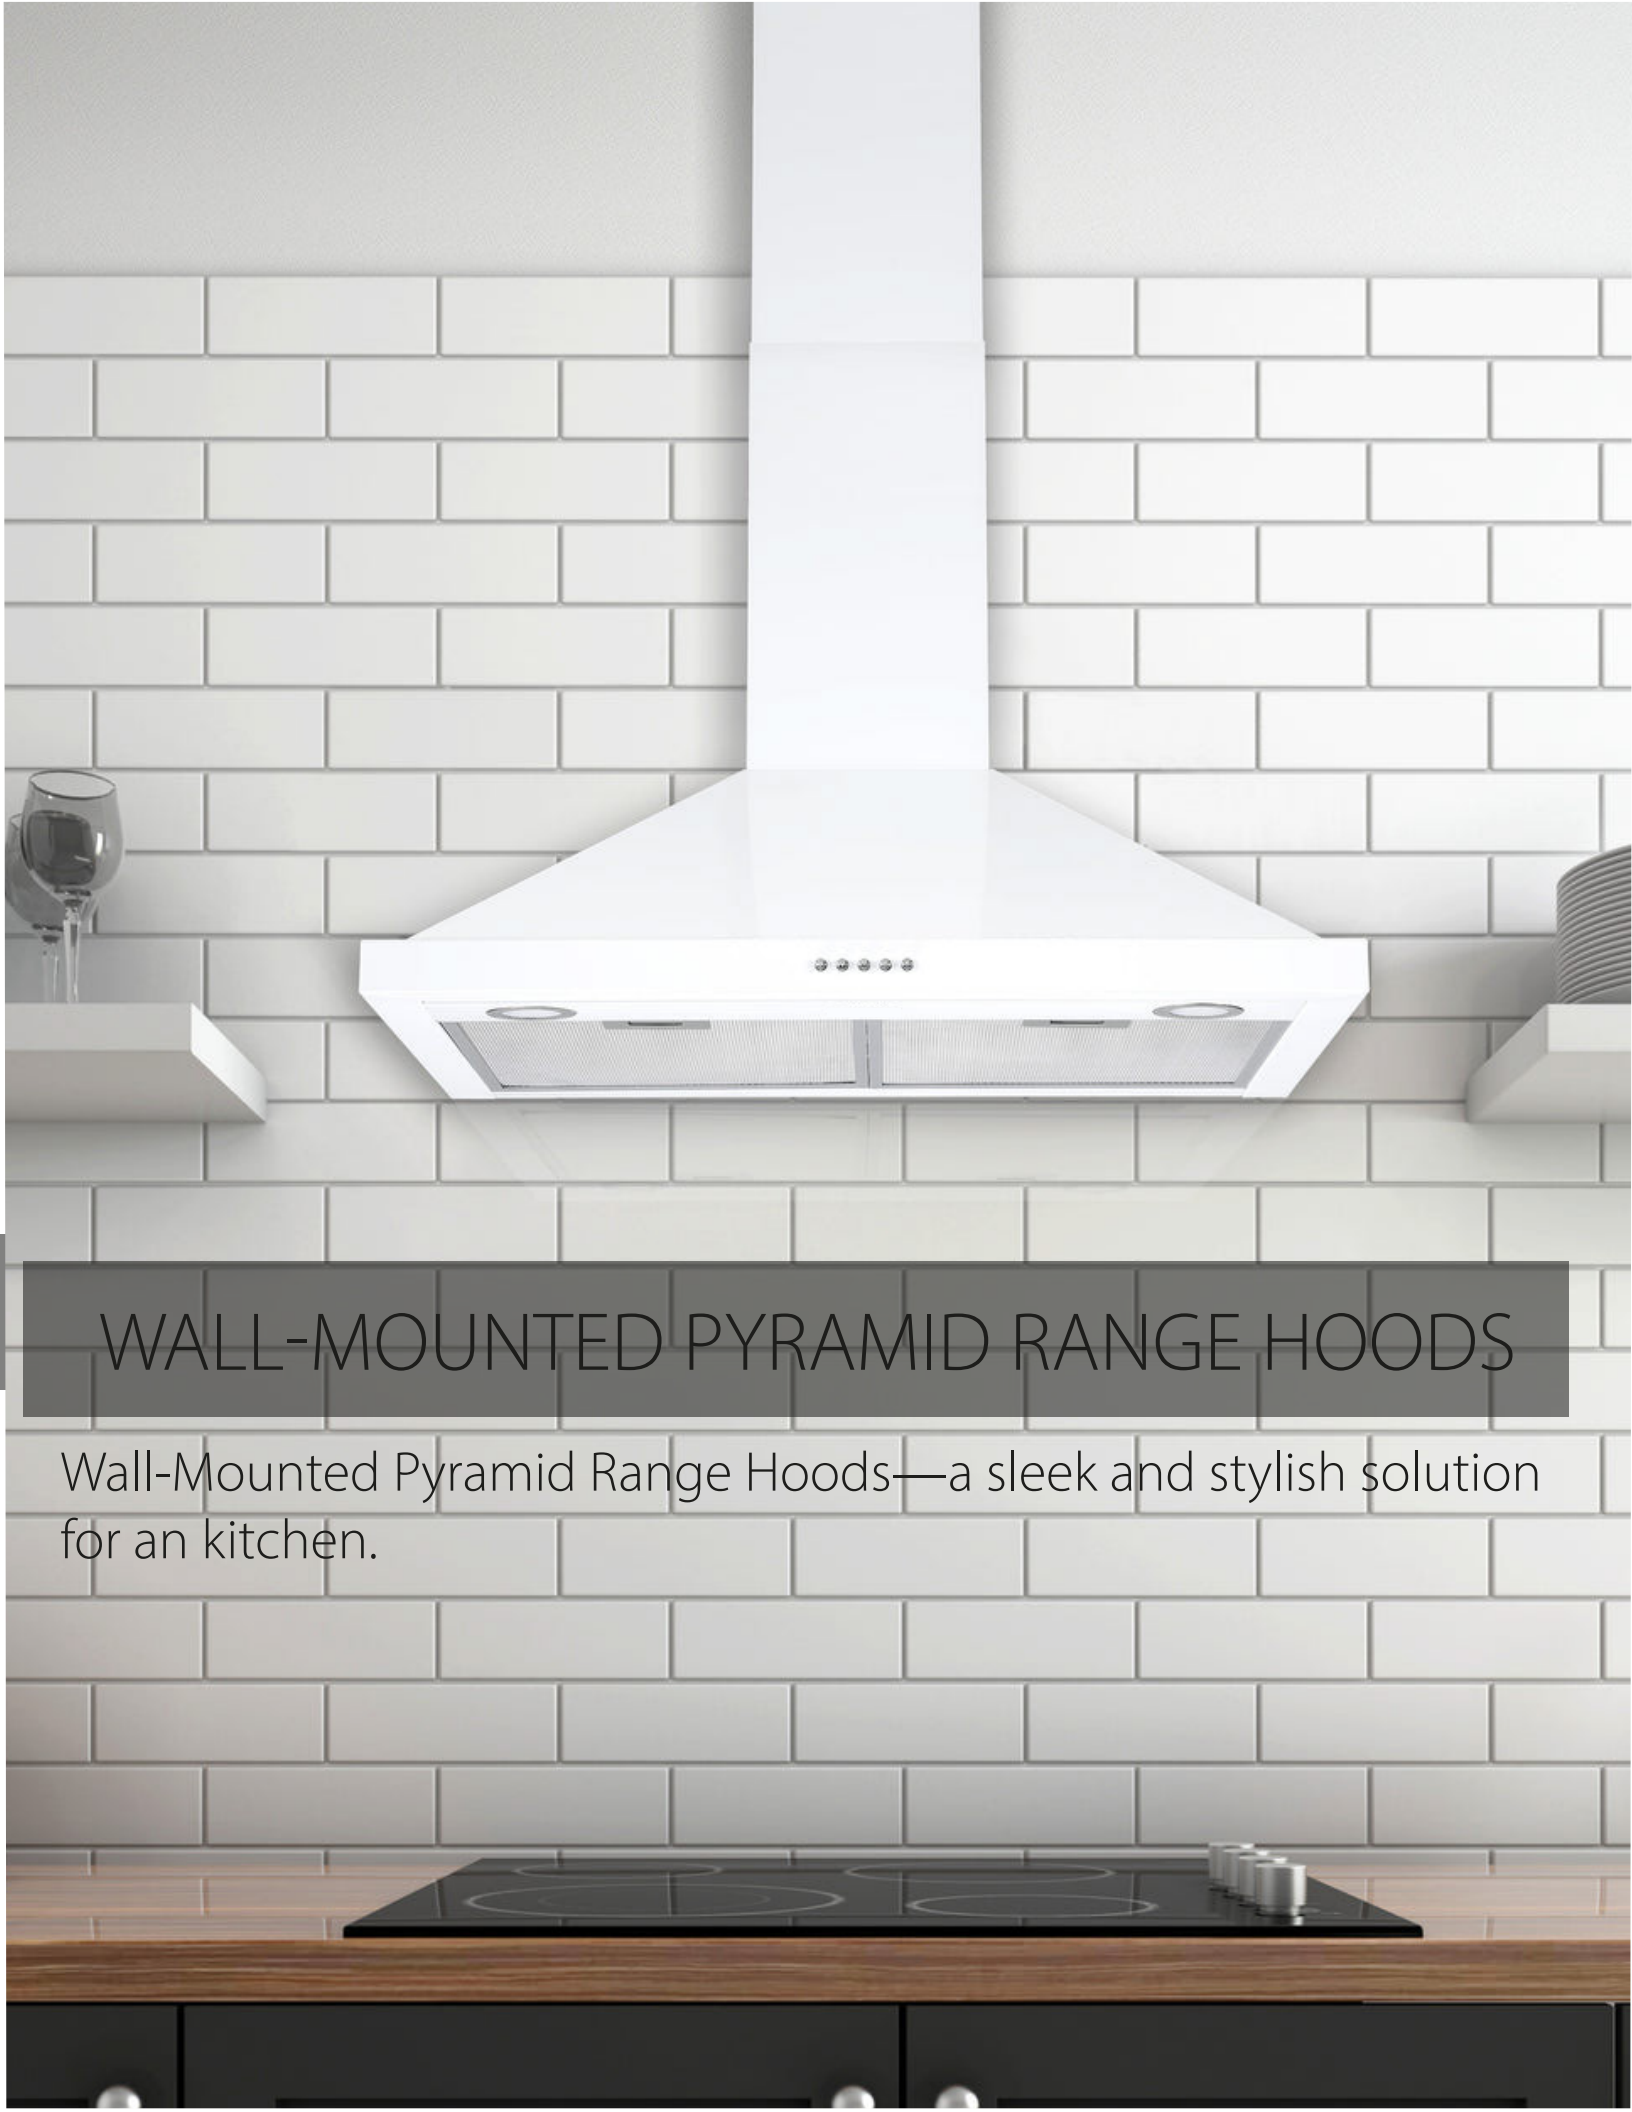

WALL-MOUNTED PYRAMID RANGE HOODS


Wall-Mounted Pyramid Range Hoods—a sleek and stylish solution for an kitchen.

Convertible



Ducted Ductless


Mechanical Push Button Controls
 Precise and easy-to-use controls for simple function selection, designed for effortless accuracy



3-speed levels Controls levels
 Adjust the speed to meet your cooking needs.



Power Airflow
 Available in 280 CFM and 440 CFM


Chimney with **Venting Trap** option, for ductless application With High-Efficiency filters.



Recirculation kit
 (Sold separately)
 For Ductless application


Durable construction
 Stainless steel
 Commercial-grade 430
 Will never rust


Quiet Mode
 TBC Decibel²
 As quiet as air conditioning¹


LED Lights - Energy Saver
 1.5 W LED Lights = 15 W halogen / 220 Lumens
 CRI 70 / up to 30 000 hrs



4000K


High-Efficiency 5-layer Aluminum Filters
 Dishwasher safe:

Ensures durability and efficient operation
 Allow air to flow with ease, effectively capturing grease particles and trapping pollutants.



Plug-in

^{*1} Compare to the most popular air conditioning

^{*2} Starting at TBC decibel at low speed

30" Convertible wall-mounted pyramid range hood

Can be converted to an internal recirculation unit with purchase of a conversion kit,
(Sold separately).

OV-2020



280 CFM

OV-2005



450 CFM



OV-2005



OV-2020



Features



3-speed levels



Mechanical push
button controls



2 x 1.5W LED lights
220 Lumens



4000K
Cool white



TBC dBA^{*2}

30" Convertible wall-mounted pyramid range hood

Can be converted to an internal recirculation unit with purchase of a conversion kit,
(Sold separately).

OV-2031WH



280 CFM

OV-2007WH



450 CFM



OV-2007WH



OV-2031WH



Features



3-speed levels



Mechanical push
button controls



2 x 1.5W LED lights
220 Lumens



4000K
Cool white



TBC dBA*²

Convertible pyramid range hood



MODEL NUMBER	OV-2020	OV-2005	OV-2031WH	OV-2007WH
--------------	---------	---------	-----------	-----------

MATERIALS/FINISH

FINISH	Stainless steel	White
MATERIAL	Stainless steel Grade 430	

CONTROLS AND FEATURES

CONTROLS TYPE	Mechanical push button
FAN SPEED	3-speed levels
TIME DELAY	No
AUTO NIGHT LIGHT	No
LED DISPLAY	No

VENTING


FILTERS	5-Layer aluminum mesh filters / Dishwasher safe
VENTING SIZE	6" (13.3 cm) round top venting
EXTRACTION TYPE	Convertible: Ducted / Ductless (Conversion kit sold separately)

LIGHTING


LIGHT BULB TYPE	2 x 1.5 W LED - Included
LUMENS	220 Lumens
COLOR TEMPERATURE	4000K Cool white

MOTOR

CFM	280	450	280	450
POWER RATING	120 V / 60 Hz (cETIus Certified)			
INPUT	85W	190W	85W	190W
AMP	1.6 A	TBC	1.6 A	TBC
NOISE LEVEL	TBC	TBC	TBC	TBC
FAN TYPE	Centrifugal			
TYPE	Single Chamber Quiet			

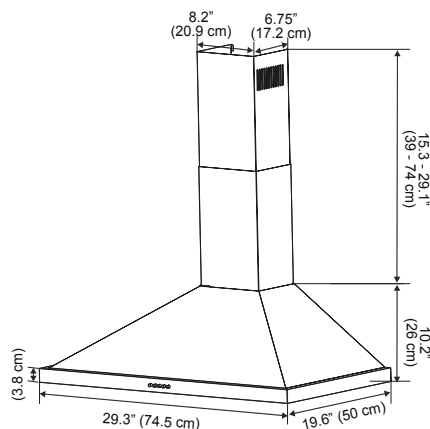

CONVERTIBLE WALL-MOUNTED PYRAMID STAINLESS STEEL RANGE HOOD



Electronic Push Button Controls
Precise and easy-to-use **illuminated** controls for simple function selection, designed for effortless accuracy




3-speed levels
Adjust the speed to meet your cooking needs.




5 Minutes Delayed Shut-off
Automatically vents excess odors and other contaminants outside.



Power Airflow
Available in 440 CFM and 600 CFM



Chimney with **Venting Trap** option, for ductless application With High-Efficiency filters.



Durable construction
Stainless steel
Commercial-grade 430
Will never rust



Quiet Mode
45 Decibel*
As quiet as air conditioning**



LED Lights - Energy Saver
1.5 W LED Lights = 15 W halogen / 220 Lumens
CRI 70 / up to 30 000 hrs



4000K



High-Efficiency Baffle Filters
Dishwasher safe:

Ensures durability and efficient operation
Allow air to flow with ease, effectively capturing grease particles and trapping pollutants.



Plug-in

*1 Compare to the most popular air conditioning

**2 Starting at 45 decibel at low speed



30" Convertible wall-mounted pyramid range hood

Can be converted to an internal recirculation unit with purchase of a conversion filter kit, (Sold separately).

OV-2022



450 CFM

OV-2002



600 CFM



Features



3-speed levels



Electronic push
button controls



2 x 1.5W LED lights
220 Lumens



4000K
Cool white




45 dBA^{*2}



Convertible pyramid range hood




MODEL NUMBER	OV-2022	OV-2002
MATERIALS/FINISH		
FINISH	Stainless steel	
MATERIAL	Stainless steel Grade 430	
CONTROLS AND FEATURES		
CONTROLS TYPE	Electronic push button	
FAN SPEED	3-speed levels	
TIME DELAY	Yes	
AUTO NIGHT LIGHT	No	
LED DISPLAY	Yes	
VENTING		
FILTERS	Baffle / Dishwasher safe	
VENTING SIZE	6" (13.3 cm) round top venting	
EXTRACTION TYPE	Convertible: Ducted / Ductless (Conversion kit sold separately)	
LIGHTING		
LIGHT BULB TYPE	2 x 1.5 W LED	
LUMENS	220 Lumens	
COLOR TEMPERATURE	4000K Cool white	
MOTOR		
CFM	450	600
POWER RATING	120 V / 60 Hz (cETIus Certified)	
INPUT	190W	380W
AMP	1.6 A	TBC
NOISE LEVEL	TBC	TBC
FAN TYPE	Centrifugal	
TYPE	Single Chamber Quiet	

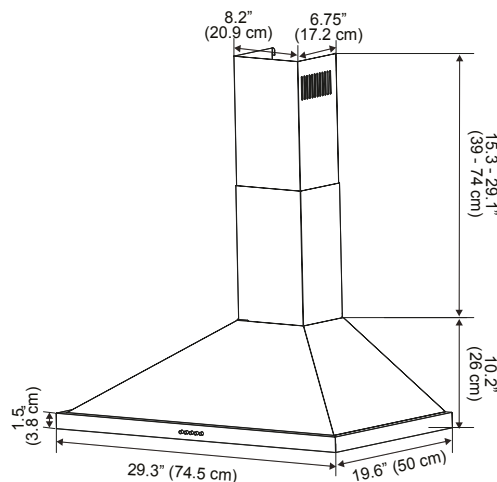



GLASS CANOPY RANGE HOODS

Our Wall Mount Glass range hoods combine sleek design with powerful ventilation, providing both a stylish focal point for your kitchen



CONVERTIBLE WALL-MOUNT PYRAMID STAINLESS STEEL / GLASS RANGE HOOD



Mechanical Push Button Controls
Precise and easy-to-use controls for simple function selection, designed for effortless accuracy



3-speed levels
Adjust the speed to meet your cooking needs.



Power Airflow
Available in 275 CFM and 440 CFM



Ultra Quiet Mode
43 / 48 Decibel*
As quiet as air conditioning*




Plug-in



LED Lights - Energy Saver
1.5 W LED Lights = 15 W halogen / 220 Lumens
CRI 70 / up to 30 000 hrs



4000K



Chimney with **Venting Trap** option, for ductless application With High-Efficiency filters.



Recirculation kit
(Sold separately)
For Ductless application



Durable construction
Stainless steel
Commercial-grade 430
Will never rust

**TEMPERED
GLASS CANOPY**



High-Efficiency 5-Layer Aluminum Filters
Dishwasher safe:
Ensures durability and efficient operation
Allow air to flow with ease, effectively capturing grease particles and trapping pollutants.

*1 Compare to the most popular air conditioning

*2 Starting at 43 \$ 48 decibel at low speed

30" Convertible wall-mounted pyramid range hood

Can be converted to an internal recirculation unit with purchase of a conversion filter kit, (Sold separately).

OV-2004



450 CFM



Features



3-speed levels



Electronic push
button controls



2 x 1.5W LED lights
220 Lumens



4000K
Cool white



43 dBA*²

30" Convertible wall-mounted pyramid range hood

Can be converted to an internal recirculation unit with purchase of a conversion filter kit, (Sold separately).

OV-2023



Features



3-speed levels



Mechanical push
button controls



2 x 1.5W LED lights
220 Lumens



4000K
Cool white




45 dBA^{*2}

Convertible wall-mount range hood



MODEL NUMBER	OV-2004	OV-2023
MATERIALS/FINISH		
FINISH	Stainless steel	
MATERIAL	Stainless steel Grade 430	
CONTROL AND FEATURES		
CONTROL TYPE	Mechanical push button	
FAN SPEED	3-speed levels	
TIME DELAY	No	
AUTO NIGHT LIGHT	No	
LED DISPLAY	no	
VENTING		
FILTERS	5-Layer aluminum mesh filter / Dishwasher safe	
VENTING SIZE	6 " (13.3 cm) round top venting	
EXTRACTION TYPE	Convertible: Ducted and ductless (conversion kit sold separately)	
LIGHTING		
LIGHT BULB TYPE	2 x 1.5 W LED - Included	
LUMENS	220 Lumens	
COLOR TEMPERATURE	4000K cool white	
MOTOR		
CFM	450	600
POWER RATING	120 V / 60 Hz (cETIus Certified)	
INPUT	88 W (85W + 2 x 1.5W)	193 W (190W + 2 x 1.5W)
AMP	0.8 A	1.6 A
NOISE LEVEL	43/51/57 dBA	46/54/59 dBA
FAN TYPE	Squirrel Cage	

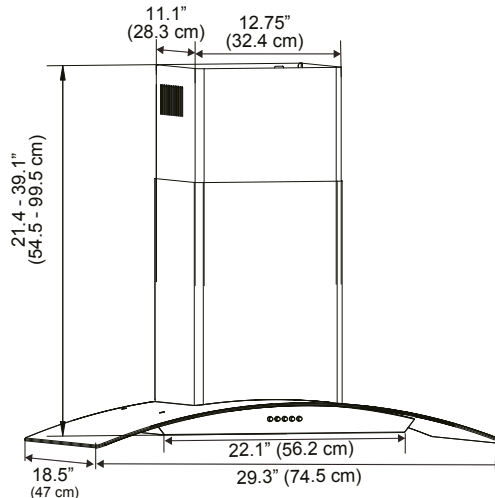

Available parts and accessories sold separately



RECIRCULATION KITS >



LIGHTS >



FILTERS >



Range hood motor



CHIMNEY EXTENSIONS >



CHIMNEY SETS >

Please contact us at 1-800-776-7891 / info@myovo.net or visit our website at www.myovo.net/rangehood/parts, if you need replacement parts.



2044 HIGHWAY 440 WEST
LAVAL, QC, H7S 2M9

1-800-776-7891

INFO@MYOVO.NET



